

# RISH Eine+ DC DPM

96X96/48X96

















# RISH Eine+ DC DPM





RISH Eine+ has been designed for industrial applications, which frequently require precise and on-site adjustment of the display range. It measures electrical DC parameters like DC voltage and DC current.

# **Applications**

- Distribution and Control Panels
- Electrical load monitoring
- In Laboratories
- In Industrial automation

# **Product Features**

# Low Back Depth (For 96x96 model)

The instrument has very low back depth (behind the panel) of less than  $40\,\mathrm{mm}$ .

# Rescalable Display range

The meter is completely programmable and user can easily scale the values as per his requirements on-field. Setting for '-ve' sign and decimal point position is also provided.

# **Function keys**

Using 2 function keys it becomes easy and convenient for user to program the meter without any difficulty.

# **Bent Characteristics**

The meter supports bent characteristics. Hence user can configure the meter as per requirement.

### **Power Factor Display**

The meter can be configured to display power factor also.

# **Ambient Temperature Indication**

The meter gives an accurate indication of the ambient temperature in °C and °F.

# **Auxillary Supply**

The Auxillary supply  $\,40\text{-}300\,\text{V}\,\text{AC-DC}$  and  $\,20\text{-}60\,\text{V}\,\text{DC}\,/\,20\text{-}40\,\text{V}\,\text{AC}$  are supported.

# 4 Full digits Ultra Bright LED display

14mm full range display possible of 4 digits having maximum count - 9999.

### **Wide Input Range**

Wide range of voltages and currents to choose from.

### **Enclosure Protection for dust and water**

Conforms to IP 50 (front face) as per IEC 60529.

### **Compliance to International Safety standards**

Compliance to International Safety standard IEC 61010-1- 2010.

# **EMC** Compatibility


Compliance to International standard IEC 61326 Class B




# RISH Eine+ DC DPM

# **Dimensional Details**

Front View



Side View



# **Technical Specifications**

Measuring Ranges

### Model

Input mV ranges Input Voltage range

Max continuous input voltage

### Model

Input Current ranges

Max continuous input current

### **Accuracy**

RISH Eine+ Voltage (Input current < 300uA) for V/mV RISH Eine+ Current (Voltage drop < 600mV) for A/mA **Ambient Temperature** 

### Influence of Variations

Temperature coefficient Zero point drift

### **Display**

Туре **Display Count Setting** Digit Height Decimal point position **Negative Display indication** Overload Indication

# **RISH Eine+ Voltage**

-75...0...75mV, -150...0...150mV -5...0...5V, -10...0...10V, 0...48V, 0...150V, 0...500V, 0...1000V 120% of Nominal value

### **RISH Eine+ Current**

-10...0...10mA, -20...0...20mA, 4...20mA, -1...0...1A, -5...0...5A 120% of Nominal value

<0.5% of Display End value ±1 digit

<0.5% of Display End value ±1 digit

±3 °C

0.05% / °C, plus 0.025% / °C

1 line 4-digit LED display -9999...-10 or +10...+9999 counts 14mm Configurable

" - oL - "

(above 125% of nominal value)

Factor C (The highest value applies if calculated C is less than 1,then C=1 applies) Bent characteristics:

Linear characteristics:

$$C = \frac{1 - \frac{Y0}{Y2}}{1 - \frac{X0}{Y2}}$$
 or C=1

For  $X0 \le X \le X1$ 

$$C = \frac{Y1 - Y0}{X1 - X0} \cdot \frac{X2}{Y2} \text{ or } C = 1$$

For  $X1 \le X \le X2$ 

$$C = \frac{1 - \frac{Y1}{Y2}}{1 - \frac{X1}{X2}}$$
 or C=1

X0 = Start value of input, Y0 = Start value of display, X1 = Elbow value of input, Y1 = Elbow value of display

X2 = End value of input, Y2 = End value of display












# RISH Eine+ DC DPM

# Installation





# **Electrical Connections**

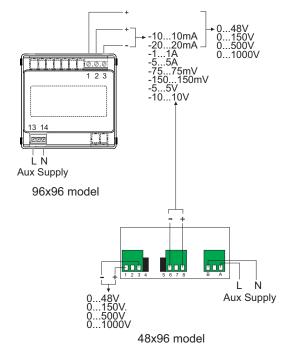

# **Technical Specifications**

**Auxiliary Supply** 

External Aux 40 - 300V AC-DC

20 - 60V DC/20-40V AC

80 - 300V AC (For 96x96 model only)

Frequency range 45 - 65Hz

VA burden < 4.5VA approx. at 240VLN, 50Hz

< 1VA approx. at 24VLN, 50Hz

**Reference Conditions for Accuracy** 

Reference Temperature  $23^{\circ}\text{C} \pm 2^{\circ}\text{C}$ Auxiliary Supply Voltage Rated Value  $\pm 1\%$ Auxiliary Supply Frequency Rated Value  $\pm 1\%$ 

**Applicable Standards** 

EMC IEC 61326-1:2005

Immunity IEC 61000-4-1 up to 4. Level 3 industrial

Low level

Safety IEC 61010-1:2010, Permanently connected use

IP for water & dust IEC60529

Pollution degree 2 Installation category III

High Voltage Test 2.2 kV AC, 50Hz for 1 minute between all

Electrical circuits.

**Environmental** 

Operating temperature -10 to +55°C Storage temperature -20 to +70°C

Relative humidity 0... 90% non condensing Warm up time Minimum 3 minute
Shock 15g in 3 planes

Vibration 10... 55 Hz, 0.15mm amplitude

**Dimensions and Weight** 

Bezel size 96 mm x 96 mm DIN43718(For 96x96 model)

48 mm x 96 mm DIN4371

(48x96 model)

Panel cutout 92 +0.8mm x 92 + 0.8mm(For 96x96 model)

43.5+0.6mm x 92+0.8mm(For 48x96 model)

Overall depth <40mm(For 96x96 model)

<75mm(For 48x96 model)

Weight 310 gm. approx.(For 96x96 model)

250 gm. approx.(For 48x96 model)

**Approbations** 

CE, RoHS









# RISH Eine+ DC DPM

# **Ordering codes**

Ordering Information		El99-	Х	1	Х	XX	Х	Х	Х	Х	000000
Size	96X96	L133-	J G								
	48X96		E								
Туре	DC Voltmeter				C						
	DC Ammeter				D						
Input	75 mV					」 11					
	150 mV					12					
						21					
	5 V										
	10 V					22					
	500 V					23					
	1000 V					24					
	48V					49					
	150V					50					
	10 mA					31					
	20 mA					32					
	4-20 mA					33					
	1A					41					
	5A					42					
Power Supply	40-300V AC/DC						М				
	20-40VAC/20-60V DC						D				
Accuracy								5			
Class	Class 0.5							<u> </u>			
IP Protection	Standard IP50								0		
	Optional IP54 (On request-chargeable)								1		
Test	Not Required									0	
Certificate	Required (On request-chargeable)									1	













# **RISHABH INSTRUMENTS LIMITED**

**Domestic (India):** +91 253 2202028/99 | marketing@rishabh.co.in **International:** +91 253 2202004/06/08/99 | global@rishabh.co.in

www.rishabh.co.in